


CONSEW Since 1898

MODEL 287RB-2

WALKING FOOT

WITH
CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM
VERTICAL AXIS ROTARY HOOK
REVERSE FEED
SAFETY CLUTCH

3 7/32"
DIAMETER
CYLINDER
BED

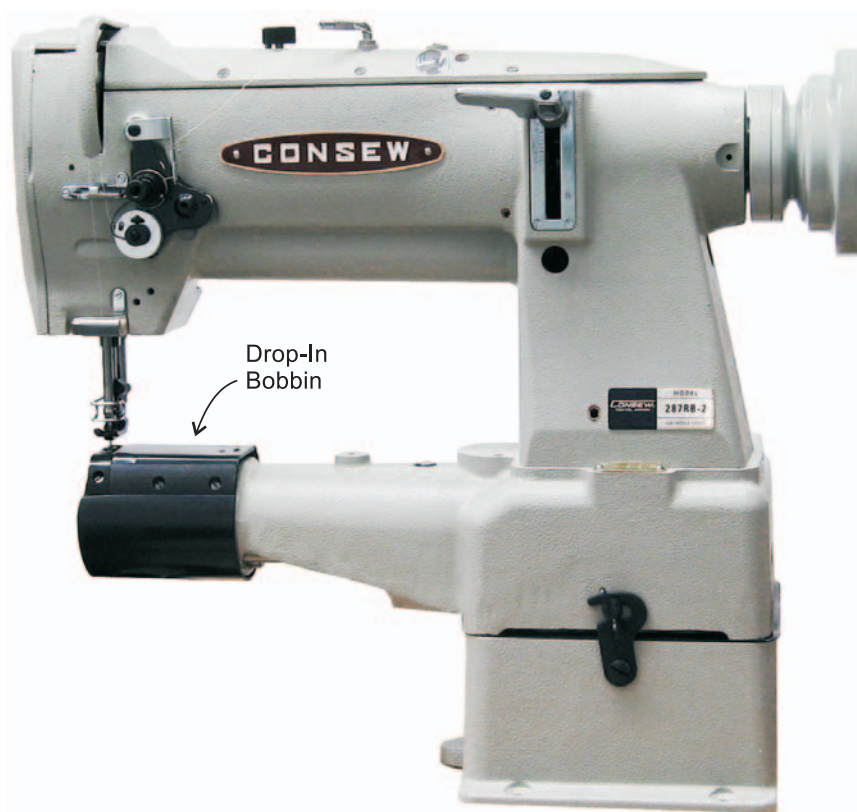

CYLINDER ARM

HEAVY DUTY CYLINDER ARM
SINGLE NEEDLE
DROP FEED, NEEDLE FEED
WALKING FOOT
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE

Model 287RB-2

APPLICATIONS

- For sewing light to heavy-weight fabrics, leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials
- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, auto, boat and furniture upholstery, tarpaulins, covers, sails, tents, awnings, umbrellas, tops, bags, luggage, handbags, travelware accessories, sports and camping equipment, wearing apparel, orthopedic appliances, slippers, etc.
- Tape Binding with synchronized binder, Model 287RBFS



FEATURES

- Vertical axis rotary hook
- Compound feed, walking foot mechanism assures even feeding of several plies or of slippery materials
- Stitches per minute — 2300*
- Centra-Lube® semi-automatic lubrication system
- Reverse feed – models 287RB-2 / 287RBFS
- Safety clutch prevents the hook from being damaged
- Simple adjustment permits the raising and lowering of the center foot which allows for sewing of different thicknesses of material



287RB Bobbin

SPECIFICATIONS

Speed, Max. (S.P.M.)*	2300	Hook	13086
Clearance Under Foot: by hand	11 ¹ / ₃₂ " (8.5mm)	Needle	135 x 17
	by pedal	35 ⁵ / ₆₄ " (14mm)	Bed Size
Needle Bar Stroke	1 ⁵ / ₁₆ " (33.2mm)	Work Space	10 ⁵ / ₃₂ " (258 mm)
Stitch Length, Max.	1/4" (6.2 mm)	Stitch Type	301
Bobbin	Metal	10656	
	Pre-wound	U	

* Speed depends on materials, thread and operation.