


Featuring:

- Oil Pump System with Pump, Oil Pan and Adjustable Oil Flow
- Adjustable Oil Gauge
- Reverse
- Large Horizontal Axis Hook and Side-Loaded Bobbin
- Adjustable Upper Thread Tension
- Locking Stitch Regulator


Since 1898
CONSEW®

PREMIER® P1206RB-1

**Drop Feed, Needle Feed
Walking Foot, Lockstitch Machine
Side Load Hook & Bobbin**

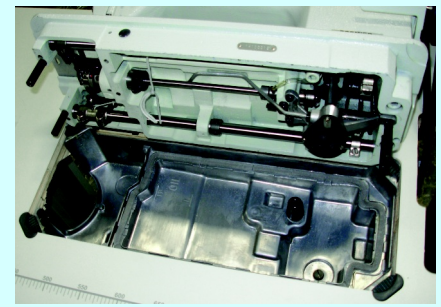

Oil Pump System with Pump, Oil Pan and Adjustable Oil Flow

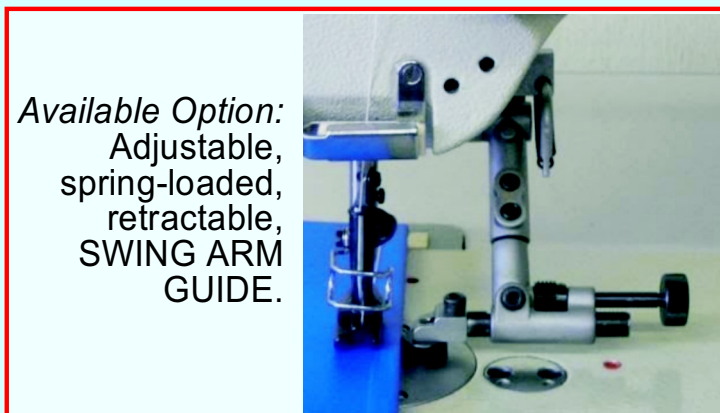

Available Option:
Adjustable, spring-loaded, retractable, **SWING ARM GUIDE.**

SPECIFICATIONS		
Speed, Max. (S.P.M.)	3000*	
Presser Foot Lift	By Hand	5/16" (8 mm)
	By Knee	5/8" (16 mm)
Needle Bar Stroke	1-29/64" (37 mm)	
Stitch Length, Max.	3.6 s.p.i. (7 mm)	
Needle	135 x 17	
Hook	Large Lubricating Hook	
Work Space	10-1/4" x 4-3/4" (260 x 120 mm)	
Stitch Type	301	
Pre-wound Bobbin	M	

* Speed depends on thread, material and operation.



CLINTON INDUSTRIES
"SERVING THE SEWING INDUSTRY SINCE 1954"

Footlift and Backtack Automation available as options from Clinton Industries.