


Since 1898
CONSEW®

MODELS 29/29B/29L/29BL

Extra Narrow, Heavy Duty Cylinder Bed Machines

With
Oscillating Shuttle
Extra Small Cylinder Bed
Universal Upper Feed
Double Ended Needle Plate
Large Bobbin Available (Model 29B/29BL)

Long Arm Version
Model 29BL
with large bobbin

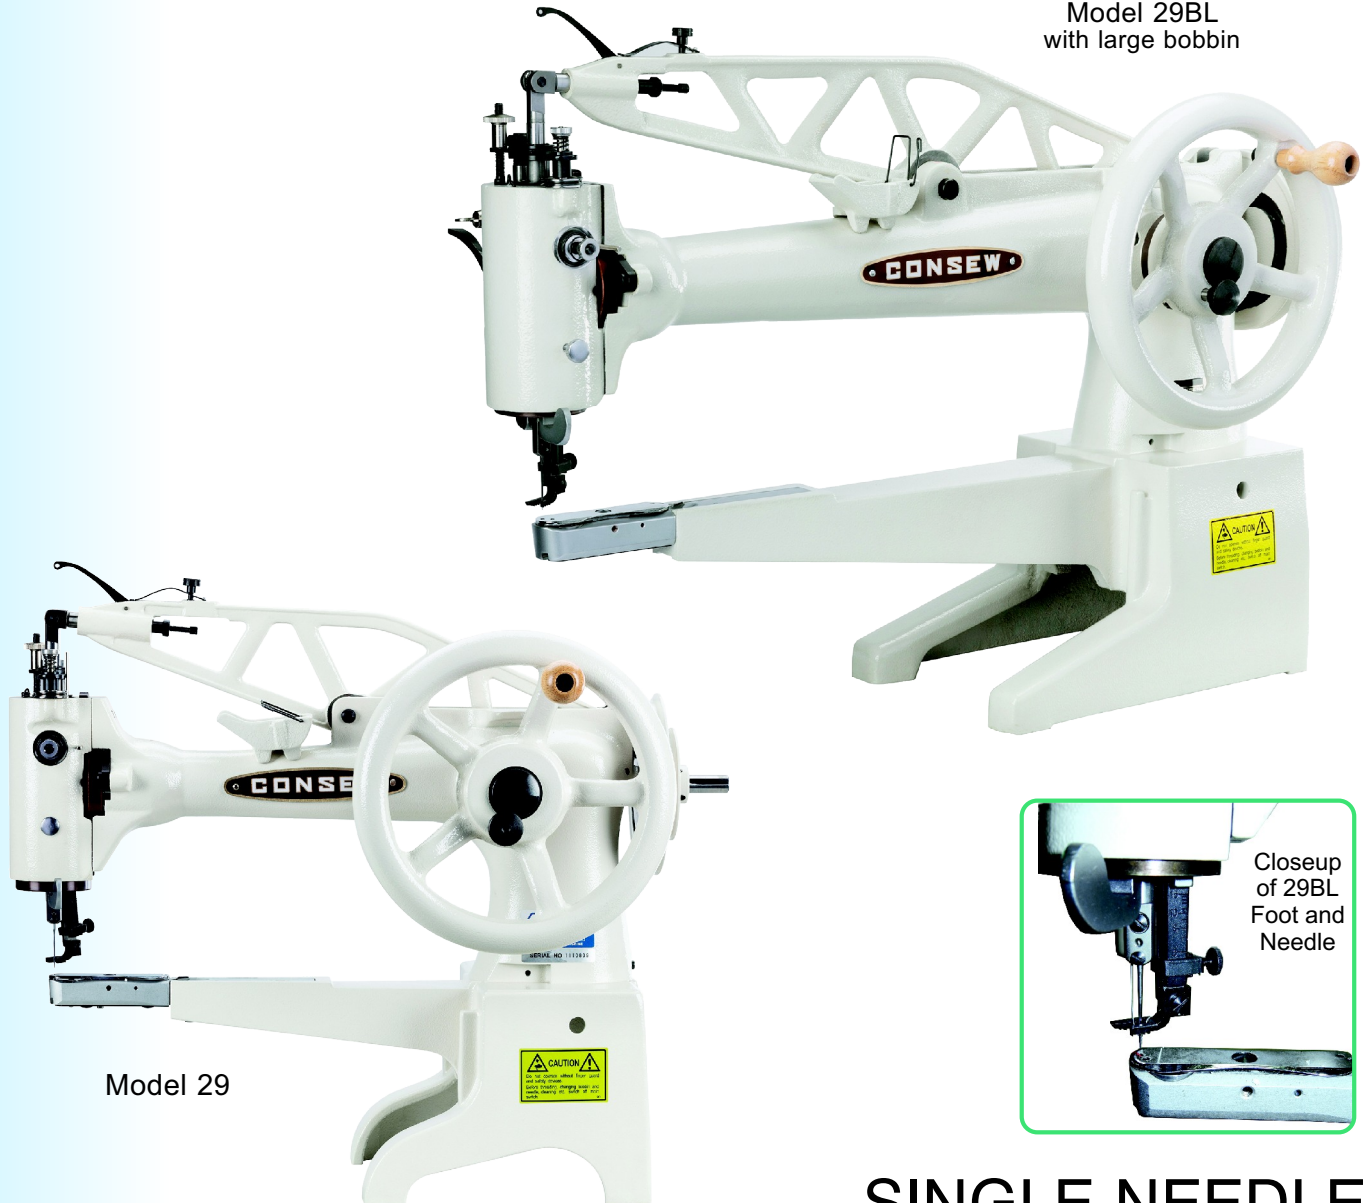

Model 29

Closeup
of 29BL
Foot and
Needle

**SINGLE NEEDLE
12" or 18" CYLINDER ARM
SHOE REPAIR AND MENDING
LOCKSTITCH MACHINE**

Model 29/29B/29L/29BL



APPLICATIONS

- Repairing of leather materials and shoe uppers.
- Any narrow area, curved sewing of heavy duty materials.
- Suitable for sewing patches on hats and jackets

FEATURES

- Extra small cylinder bed.
- Oscillating Shuttle
- Universal upper feed for stitching in any direction without turning work
- Handwheel can be mounted on front or right end of machine.
- Wheel pulley "V" groove for motor drive.
- Double ended needle plate with different size holes at back end to accommodate various size needles.
- Adjustable thread take-up lever.
- Adjustable presser foot pressure and thread tension.
- Machine can be driven by foot treadle, hand crank or electric motor.
- Available in regular and large bobbin (B) versions
- Available in regular and long arm (L) versions



SPECIFICATIONS

	Model 29	Model 29B	Model 29L	Model 29BL
Speed, Max. (S.P.M.) *	500	500	500	500
Clearance Under Presser Foot	13/32 s.p.i. (10.5mm)	13/32 s.p.i. (10.5mm)	13/32 s.p.i. (10.5mm)	13/32 s.p.i. (10.5mm)
Stitch Length	3.5 s.p.i. (1-7mm)	3.5 s.p.i. (1-7mm)	3.5 s.p.i. (1-7mm)	3.5 s.p.i. (1-7mm)
Hook Size	Small	Large	Small	Large
Work Space	12" (310mm)	12" (310mm)	18" (460mm)	18" (460mm)
Width of Cylinder Bed	1" (25.4mm)	1 ⁵ / ₃₂ " (27.8mm)	1" (25.4mm)	1 ⁵ / ₃₂ " (27.8mm)
Depth of Cylinder Bed	7/8" (22.2mm)	1 ³ / ₃₂ " (29.4mm)	7/8" (22.2mm)	1 ³ / ₃₂ " (29.4mm)
Needle	135X17 or 29X3	TVX5 (149X5)	135X17 or 29X3	TVX5 (149X5)
Net Weight	62 lbs. (28kgs)	62 lbs. (28kgs)	77 lbs. (35kgs)	77 lbs. (35kgs)
Gross Weight	70.5 lbs. (32kgs)	70.5 lbs. (32kgs)	88 lbs. (40kgs)	88 lbs. (40kgs)
Total Carton Size	3.2 ft ³ (.09cbm)	3.2 ft ³ (.09cbm)	5.3 ft ³ (.15cbm)	5.3 ft ³ (.15cbm)

* Depending on materials and thread