


Model 7360RB-DD-1

FEATURES

- Direct drive to top shaft for energy savings and quiet operation
- Low vibration gear transmission
- Large hook and bobbin
- Built-in bobbin winder.
- Side load bobbin - easy access
- Needle positioning with convenient button to position needle up/down
- Stopper pin with a lock pin to avoid unequal stitches caused by feed regulator vibration
- Advanced oiling system (semi-dry)
- Needle bar designed to require minimal lubrication
- Safety switch keeps machine from operating when in non-upright position
- Variable speed control

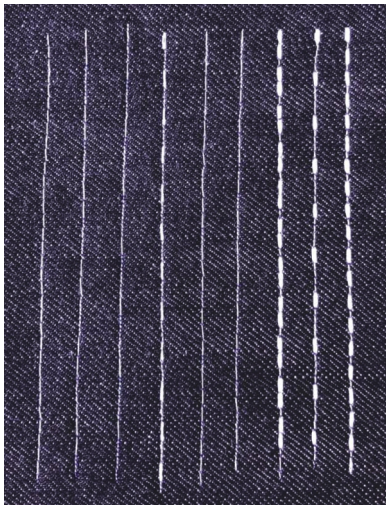

7360RB-DD-1 Decorative Stitches



APPLICATIONS

- For jeans, shirts, sportswear, and any light to medium weight fabric.

SPECIFICATIONS 7360RB-DD-1

Speed, Max. (S.P.M.)	5000*
Clearance Under Foot	1/4" (6mm)
Needle Bar Stroke	1-7/32" (31 mm)
Stitch Length, Max.	6 s.p.i. (4 mm)
Needle	16 x 257
Stitch Type	301

Power: Only available in 220 v single phase
Inquire on special order for other voltages

* Speed depends on thread, material and operation.

**ULTRA HIGH SPEED
 SINGLE NEEDLE
 LOCKSTITCH MACHINE
 SERVO MOTOR DIRECT TO TOP SHAFT
 NEEDLE POSITIONING
 SEMI-DRY OILING**