


Since 1898
CONSEW®

PREMIER® **P1255RB-1**

Drop Feed, Needle Feed
Walking Foot
Lockstitch Machine

FLAT BED

PREMIER®

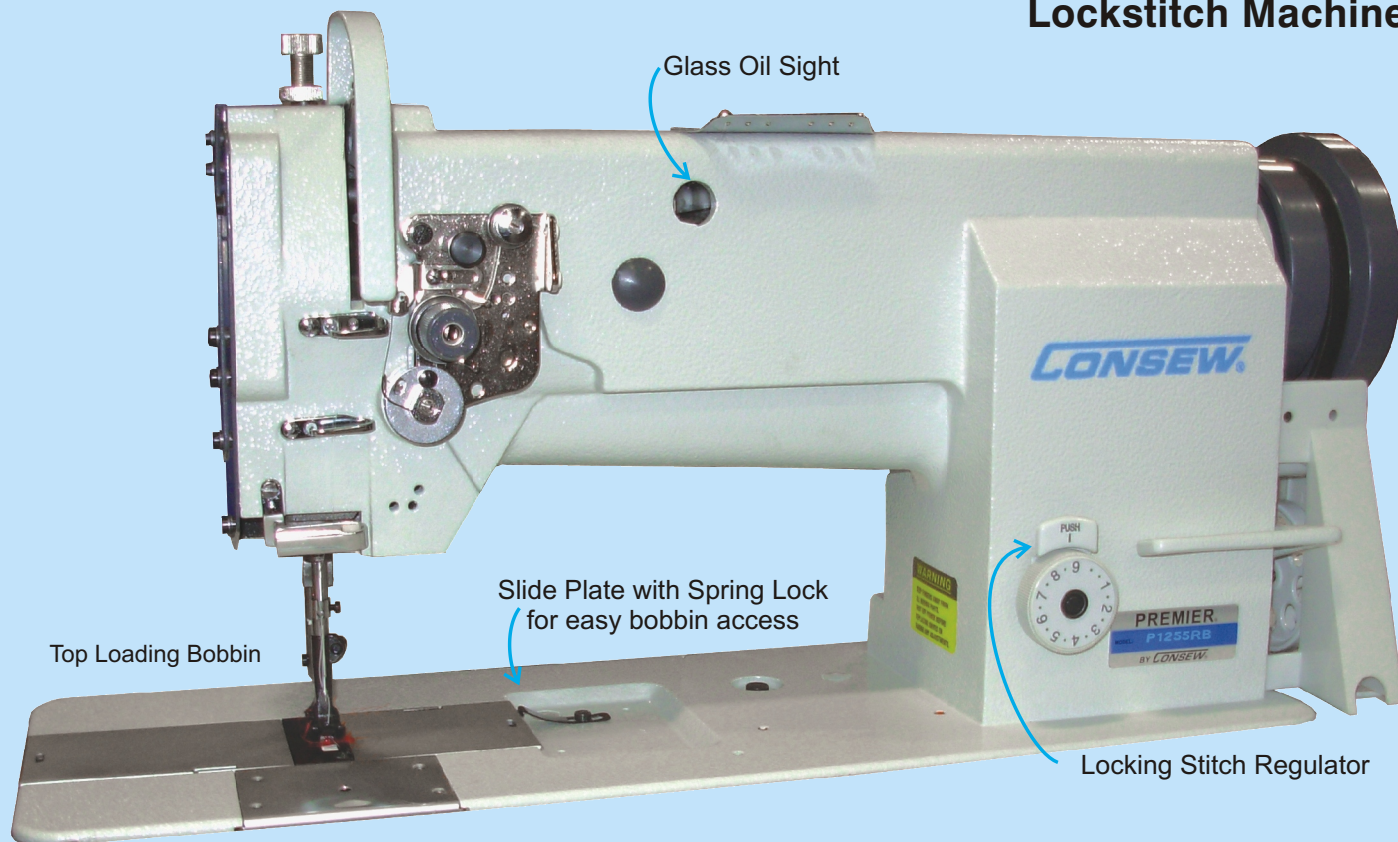

Glass Oil Sight


Slide Plate with Spring Lock
for easy bobbin access

Top Loading Bobbin

Locking Stitch Regulator

Push-button thread tension release

Adjustable
takeup thread
guide for thread
loop timing

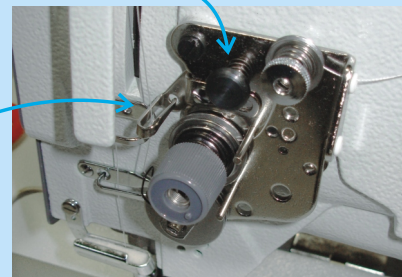

- Large Vertical Axis Automatically Oiled Hook
- Oil Pump System with Adjustable Oil Flow
- Upper Oil Glass Sight
- Barrel-type, Locking Stitch Regulator
- Reverse
- Safety Clutch
- Large Top-Loaded Bobbin
- Locking Slide Plate for easy bobbin access.
- Adjustable Take-Up Thread Guide for thread loop timing
- Quick Tension Release

SPECIFICATIONS

Speed, Max. (S.P.M.)	2600*	
Presser Foot Lift	By Hand	5/16" (8 mm)
	By Knee	33/64" (13 mm)
Needle Bar Stroke	1.27/64" (36 mm)	
Stitch Length, Max.	2.8 s.p.i. (9 mm)	
Needle	135 x 17	
Hook	Large Lubricating Hook	
Work Space	9-7/8" x 3-15/16" (250 x 100 mm)	
Stitch Type	301	
Pre-wound Bobbin	U or S	

* Speed depends on thread, material and operation.