

**Designed for automotive, marine, leather, canvas and general upholstery.**  
**The Automatic Footlift and Reverse on these machines operates Pneumatically (air) and requires a compressed air source (not supplied by Consew.)**



Direct Drive internal Motor  
 Speed, maximum: 2500 - 3000 spm  
 Stitch Length; Max. 9mm  
 Presser Foot Lift By Hand: 9 mm By Knee: 16mm  
 Lubrication: Semi-Automatic  
 Adjustable Presser Feet Climbing  
 Built in Bobbin Winder  
 Safety Clutch



Model  
**P1510RB-7DD-14**  
 1-Needle


**Currently Available in 220VAC Version ONLY.**



Model  
**P1560RB-7DD-14**  
 2-Needle



Model  
**P1510RBL-18-DD/220**

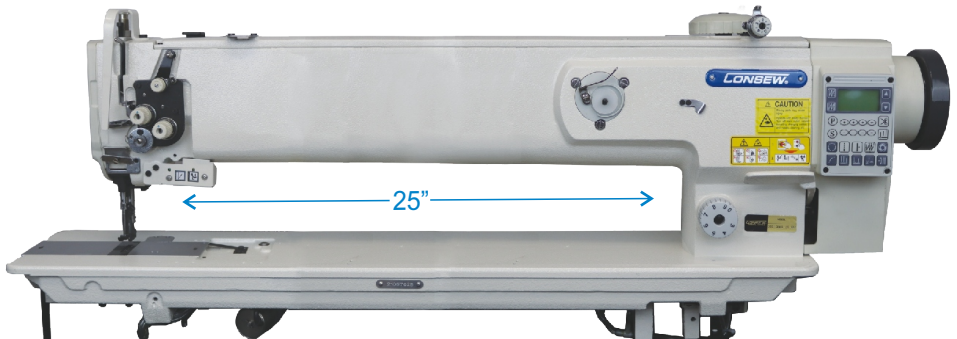

Model  
**P1510RBL-25-DD/220**

**FEATURES**  
**(-7DD) Featuring**

- Computer controlled
- Automatic Functions

Auto Footlift, Auto Reverse, Auto Thread Trim, Auto Needle Position  
 Programmed Pattern Stitching. Stitch Counting

**New Feature for -7DD**

- Roll-In, tucks the top thread under fabric when it starts!

*The major difference between the 1510RB-DD series and 1510RB-7DD series is that the -DD series does **NOT** include the Auto Thread Trimmer*

**All configurations are also available WITHOUT the Direct Drive motor and computer controls, and thus require the traditional Table/Stand/Motor for standard powered machines.**

P1560RB-14

See Guide on Next Page

Model	Workspace	Single Needle	Two Needle	DD + Auto Functions	No Auto Thread Trimmer	NO DD Motor	Footlift Kit Available	220 V Dir Drv	Needs Motor/ Table	Split Needle Bar
P1510RB-14-7DD/220	14"	■	□	■	□	□	□	■	□	□
P1510RBL-18-7DD/220	18"	■	□	■	□	□	□	■	□	□
P1510RBL-25-7DD/220	25"	■	□	■	□	□	□	■	□	□
P1560RB-14-7DD/220	14"	□	■	■	□	□	□	■	□	□
P1560RBL-18-7DD/220	18"	□	■	■	□	□	□	■	□	□
P1560RBL-25-7DD/220	25"	□	■	■	□	□	□	■	□	□
P1565RB-14-7DD/220	14"	□	■	■	□	□	□	■	□	■
P1565RBL-18-7DD/220	18"	□	■	■	□	□	□	■	□	■
P1565RBL-25-7DD/220	25"	□	■	■	□	□	□	■	□	■
P1510RB-14-DD/220	14"	■	□	■*	■*	□	□	■	□	□
P1510RBL-18-DD/220	18"	■	□	■*	■*	□	□	■	□	□
P1510RBL-25-DD/220	25"	■	□	■*	■*	□	□	■	□	□
P1560RB-14-DD/220	14"	□	■	■*	■*	□	□	■	□	□
P1560RBL-18-DD/220	18"	□	■	■*	■*	□	□	■	□	□
P1560RBL-25-DD/220	25"	□	■	■*	■*	□	□	■	□	□
P1565RB-14-DD/220	14"	□	■	■*	■*	□	□	■	□	■
P1565RBL-18-DD/220	18"	□	■	■*	■*	□	□	■	□	■
P1565RBL-25-DD/220	25"	□	■	■*	■*	□	□	■	□	■
P1510RB-14	14"	■	□	□	□	■	■	□	■	□
P1510RBL-18	18"	■	□	□	□	■	■	□	■	□
P1510RBL-25	25"	■	□	□	□	■	■	□	■	□
P1560RB-14	14"	□	■	□	□	■	■	□	■	□
P1560RBL-18	18"	□	■	□	□	■	■	□	■	□
P1560RBL-25	25"	□	■	□	□	■	■	□	■	□
P1565RB-14	14"	□	■	□	□	■	■	□	■	■
P1565RBL-18	18"	□	■	□	□	■	■	□	■	■
P1565RBL-25	25"	□	■	□	□	■	■	□	■	■

**Currently Available in 220VAC Version ONLY.**