



DIRECT DRIVE
LARGE WORKSPACE

CONSEW® Since 1898

Model P1560RB-DD and -7DD series TWO NEEDLE

Designed for automotive, marine, leather, canvas and general upholstery.

The Automatic Footlift and Reverse on these machines operates Pneumatically (Air) and require a compressed air source (not supplied by Consew.)

Automatic Function Machines (-DD)

The (-DD) does NOT have the Automatic Thread Trim

P1560RB-14-DD/220 14"

P1560RBL-18-DD/220 18"

P1560RBL-25-DD/220 25"

Currently Available in 220V 1-phase Version ONLY.

Full Automatic Function Machines (-7DD)

The (-7DD) has Automatic Thread Trim


P1560RB-14-7DD/220 14"

P1560RBL-18-7DD/220 18"


P1560RBL-25-7DD/220 25"

Currently Available in 220V 1-phase Version ONLY.

**AUTOMATIC
FUNCTIONS**

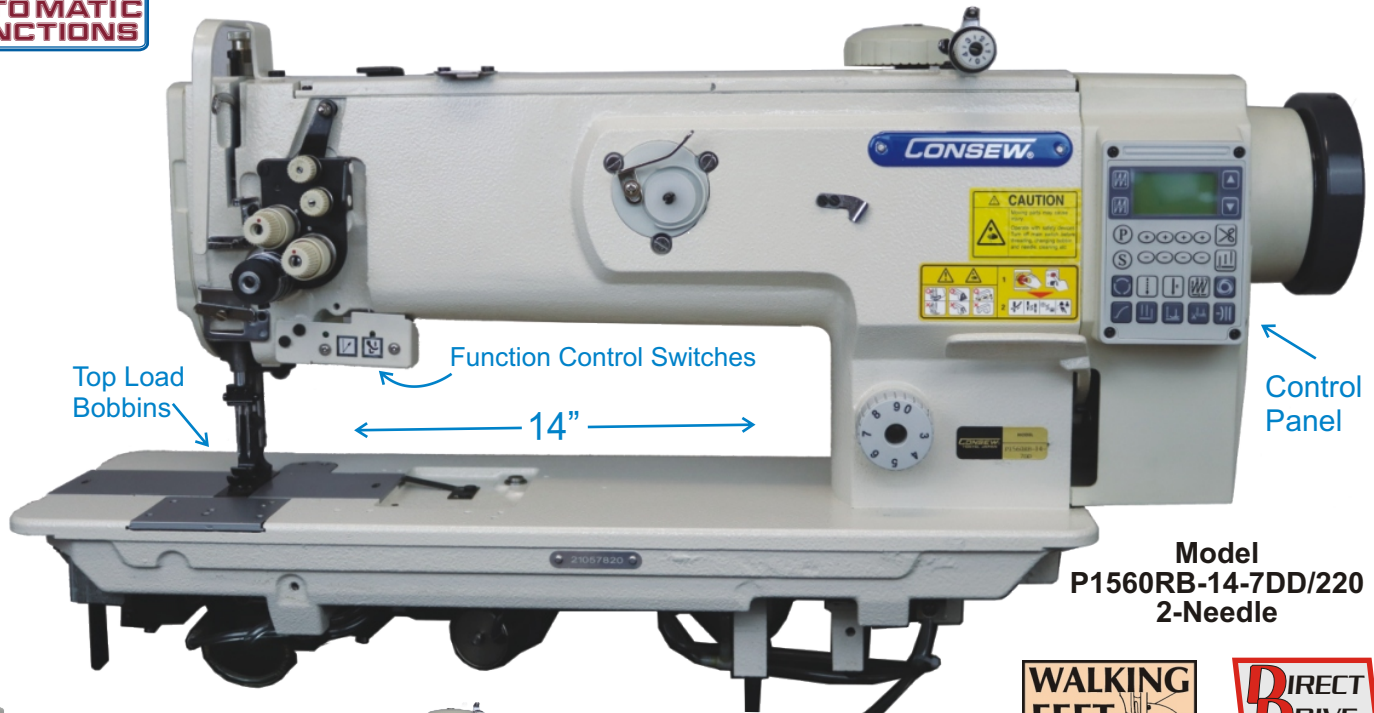

Model P1560RBL-25-DD/220
2-Needle

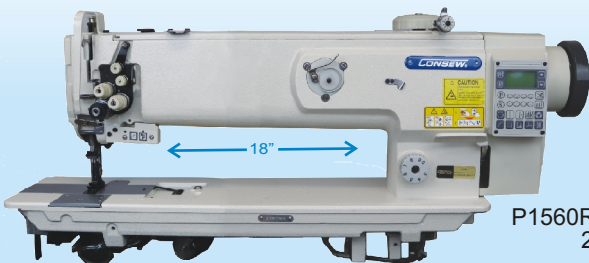

Model P1560RBL-18-DD/220
2-Needle

Also Available
as
P1565RB-series
that has split
needle bar.

Automatic Functions
High Speed
Direct Drive
(Servo Motor connected to Top Shaft)
Two Needle
Walking Foot
Lockstitch Machines

Automatic Function Machines (-DD) No Auto Thread Trim
P1560RB-14-DD/220 14" workspace
P1560RBL-18-DD/220 18"
P1560RBL-25-DD/220 25"

Full Automatic Function Machines (-7DD) with Auto Thread Trim
P1560RB-14-7DD/220 14" workspace
P1560RBL-18-7DD/220 18"
P1560RBL-25-7DD/220 25"

Also Available
 as
P1565RB-series
 that has split
 needle bar.

APPLICATIONS

- For sewing light to heavy-weight fabric, canvas, leather, vinyl, synthetics and various laminated and coated materials
- Designed for stitching such products as auto, boat and furniture upholstery, tarpaulins, covers, awnings, tents, umbrellas, handbags, luggage, travelware accessories, sports and camping equipment, wearing apparel, outdoor clothing, footwear, foundation garments, orthopedic appliances, etc.

Features for -7DD

- Large Top Load Bobbins
- Built-in Bobbin Winder
- Walking Foot
- Climbing Device
- Roll-In, tucks the top thread under fabric when it starts
- Automatic Foot Lift
- Automatic Reverse
- Semi-Automatic Lubrication
- Convenient push-button control switches
- Automatic Thread Trim (on -7DD only)

Features for -DD


- Same as -7DD except it does NOT have the Automatic Thread Trim



Control Panel

P1560RB-14-7DD/220V

This is a fully automatic machine, and includes the air cylinders for the **footlift, reverse feed, and trim functions.**

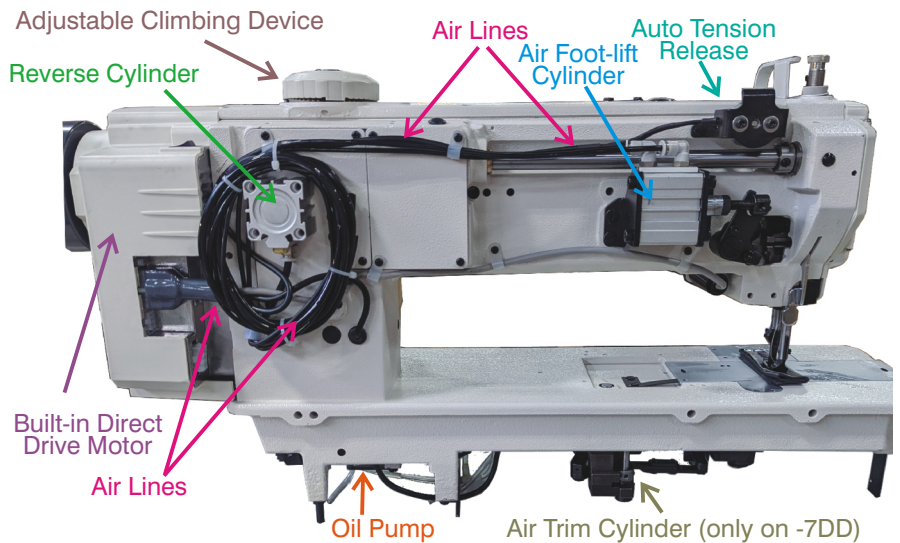

SPECIFICATIONS

P1560RB series

Speed, Max. (S.P.M.)	*	2500 - 3000*
Clearance Under Foot		9/16" (14mm)
Presser Foot Lift	By Hand:	(9 mm)
	By Knee:	(16 mm)
Stitch Length, Max.		Max. 9mm adjustment by dial
Needle		135 x 17
Bobbin - Pre-wound		U or S
Work Space		14" (355 mm), 18" (457 mm)
		25" (635 mm)
Stitch Type		301
Needle Gauges		1/4" to 1" (Custom gauges also available)

* Speed depends on thread, material and operation.

Currently Available in 220v 1-phase Version ONLY.

* Speed depends on thread, material and operation.


TWO
NEEDLE
WALKING
FEET



THREAD TRIMMER ON -7DD



Thread Trimmer Knife

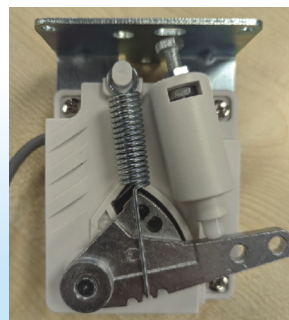

Treadle control lever.

This is plugged in to the motor's electronics and is connected to the foot treadle with the treadle rods



Thread Trimmer Solenoid