


Since 1898  
**CONSEW**®

**PREMIER® P2339RB-1**  
**DOUBLE NEEDLE**  
**Drop Feed, Needle Feed, Walking Foot**  
**Lockstitch Machine**

**FLAT BED**

**PREMIER®**

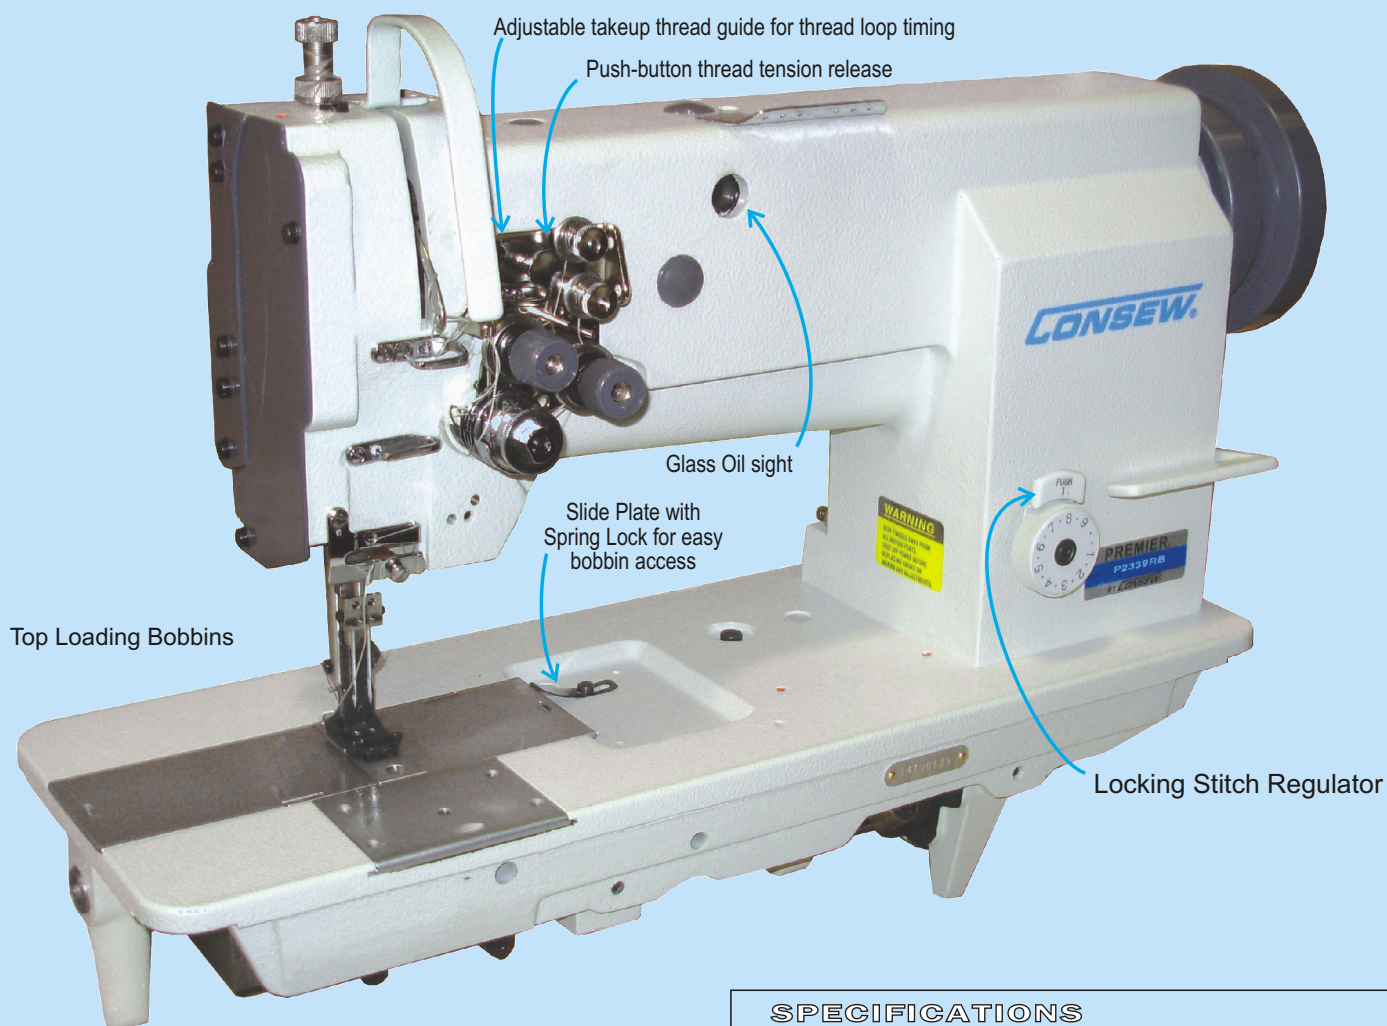

- Large Vertical Axis Automatically Oiled Hook
- Oil Pump System with Adjustable Oil Flow
- Upper Oil Glass Sight
- Barrel-type, Locking Stitch Regulator
- Reverse
- Large Top-Loaded Bobbins
- Safety Clutch
- Locking Slide Plate for easy bobbin access.
- Adjustable Take-Up Thread Guide for thread loop timing
- Quick Tension Release

**SPECIFICATIONS**

Speed, Max. (S.P.M.)	2600*	
Presser Foot Lift	By Hand	5/16" (8 mm)
	By Knee	33/64" (13 mm)
Needle Bar Stroke	1-27/64" (36 mm)	
Stitch Length, Max.	2.8 s.p.i. (9 mm)	
Needle **	135 x 17	
Hook	Large Lubricating Hook	
Work Space	9-7/8" x 3-15/16" (250 x 100 mm)	
Stitch Type	301	
Pre-wound Bobbin	U or S	

\* Speed depends on thread, material and operation.

\*\* Many twin needle gauge options available