

**FULL
AUTO
FUNCTION**

**DIRECT
DRIVE**

Since 1898
CONSEW[®]

Model 7360R-7DD-SS

WITH
STAINLESS STEEL BED PLATE
AUTOMATIC LUBRICATION
REVERSE FEED
AUTOMATIC FUNCTIONS



7360R-7DD-SS

**HIGH SPEED
SINGLE NEEDLE
DROP FEED
LOCKSTITCH MACHINE**

Model 7360R-7DD-SS

APPLICATIONS

- For sewing light to heavy-weight materials including cottons, knits, polyester, nylon, sheer fabrics and denim
- Suitable for stitching such products as blouses, shirts, men's, ladies and children's apparel, uniforms, overalls, lingerie, etc.
- Heavyweight fabrics such as jeans can be sewn by changing the needle plate, feed dog, foot, stitch regulator, hook and needle bar

FEATURES


- Stainless steel bed plate. Longest lasting surface you can find.

Advantages of a Stainless Steel Bed Plate:

- Preserves the appearance of the bed - No paint to get worn off - Therefore enhancing resale value.
- Resists rust.
- Lets the fabric move more easily (less friction) thus improving efficiency.
- Non-Magnetic - Can be easier when sewing magnetic tape, grommets and snaps.

- Fully automatic lubrication with recirculating high pressure pump and oil glass indicator
- Noise and vibration absorbing table mounting
- Automatic reverse
- Auto-lubrication rotary hook
- Under bed thread trimmer
- Electric and manual foot lift
- Locking stitch regulator
- Built-in LED light with level settings and on/off switch
- Built-in 3/4HP, 550 watt Direct Drive Motor (110v or 220v)
- Electric thread clamp (holds thread after thread trim)
- Needle positioning
- Built-in stitch counter
- Built-in bobbin winder

Built-in Bobbin Winder

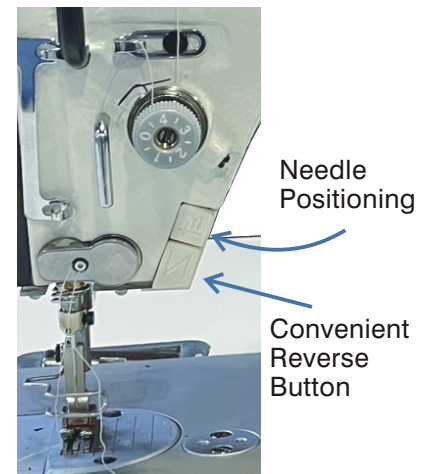

Built-In, Direct Drive 3/4HP, 550 watt Motor (110v or 220v)



SPECIFICATIONS

Speed,@ Max. (S.P.M.) *	5000*
Clearance Under Foot	1/4" (6 mm)
Needle Bar Stroke	1 1/4" (31.8 mm)
Stitch Length, Max.	4 SPI (6.2 mm)
Needle	DBX1
Bobbin	L
Bed Size	7" x 18 7/8" (177 x 477 mm)
Work Space	10" (258 mm)
Stitch Type	301
* Speed depends on materials, thread and operation	