

**FULL
AUTO
FUNCTION**

**DIRECT
DRIVE**

Since 1898
CONSEW[®]

Models 7360R-7DD-1

7360RH-7DD-1 HEAVY
DUTY

7360RB-7DD-1 LARGE
BOBBIN

7360RB-7DD-DSM Programmable
Stitching



7360R-7DD-1



7360RH-7DD-1



7360RB-7DD-DSM

**HIGH SPEED
SINGLE NEEDLE
DROP FEED
LOCKSTITCH MACHINES**

Models 7360R-7DD-1, 7360RH-7DD-1, 7360RB-7DD-1, 7360RB-7DD-DSM

HEAVY DUTY

LARGE BOBBIN

PROGRAMMABLE STITCHING


APPLICATIONS

- For sewing light to heavy-weight materials including cottons, knits, polyester, nylon, sheer fabrics and denim
- Suitable for stitching such products as blouses, shirts, men's, ladies and children's apparel, uniforms, overalls, lingerie, etc.
- Heavyweight fabrics such as jeans can be sewn by changing the needle plate, feed dog, foot, stitch regulator, hook and needle bar


FEATURES

- Fully automatic lubrication with recirculating high pressure pump and oil glass indicator
- Noise and vibration absorbing table mounting
- Treadle controlled foot lifter
- Automatic reverse
- Auto-lubrication rotary hook
- Under bed thread trimmer
- Needle positioning
- Electric and manual foot lift
- Built-in stitch counter
- Locking stitch regulator
- Built-in bobbin winder
- Built-in LED light with level settings and on/off switch
- Built-in 3/4HP, 550 watt Direct Drive Motor (110v or 220v)
- Electric thread clamp (holds thread after thread trim)

Built-in Bobbin Winder

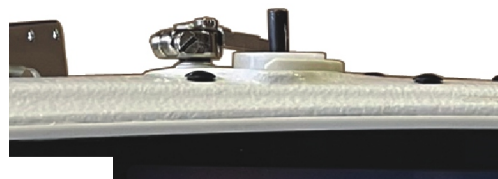

DSM model programmer and display

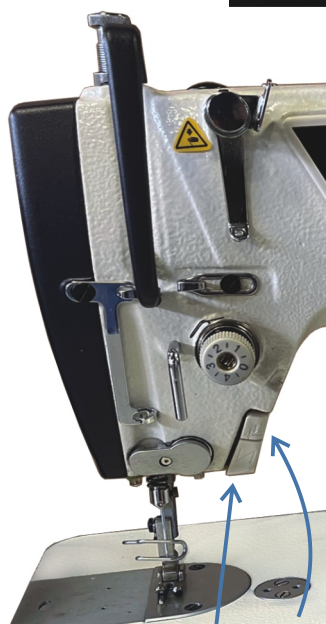

Convenient Reverse Button Needle Positioning

Built-In, Direct Drive 3/4HP, 550 watt Motor (110v or 220v)



SPECIFICATIONS

Model	7360R-7DD-1	7360RB-7DD-1	7360RH-7DD-1
Speed, @ Max. (S.P.M.) *	5000*	3500*	3600*
Clearance Under Foot	1/4" (6 mm)	1/4" (6 mm)	1/4" (6 mm)
Needle Bar Stroke	1 1/4" (31.8 mm)	1 5/16" (33 mm)	1 1/4" (31.8 mm)
Stitch Length, Max.	4 SPI (6.2 mm)	3 1/2 SPI (7 mm)	5 SPI (5 mm)
Needle	DBX1	DBX5	DBX5
Bobbin	L	M	L
Bed Size	7" x 18 7/8" (177 x 477 mm)		
Work Space	10" (258 mm)		
Stitch Type	301		

* Speed depends on materials, thread and operation